



## KEY FEATURES

Smart time-saving features for effortless GIS data collection and maintenance

Seamless GPS control for quality position data

Graphical navigation and real-time map display

Runs on Trimble's ruggedized Windows Mobile field computers

H-Star data collection for high accuracy with the GPS Pathfinder ProXRT and ProXH receivers, or the GeoXH handheld

Real time GLONASS support for the GPS Pathfinder ProXRT receiver and Trimble R8 GNSS receiver

## FIELD SOFTWARE FOR QUALITY GIS DATA

The TerraSync™ software is powerful field software, designed for fast and efficient data collection and maintenance. Teamed up with a supported Trimble® GPS receiver and a field computer of your choice, it's all you need to collect quality feature and position data for your geographic information system (GIS).

### Effortless data collection

Whether you need to collect many identical assets or a range of assets with many different attributes, the TerraSync software lets you collect high quality data quickly and easily. You can create a data dictionary based on the enterprise GIS so that features, attributes, and acceptable attribute values match the GIS data structure. Now you can be sure that the data you collect will always meet the decision makers' requirements.

Using a data dictionary improves efficiency and ease of use in the field, with time-savers like pre-defined pick lists and automatic generation of date and time values. And, to make your field session effortless, the TerraSync software puts smart features—like map-centric operation, graphical status display, and the ability to record a position offset if you can't get right to the feature—at your fingertips.

### Smart data maintenance

When you need to go back into the field to verify and update your GIS data, the TerraSync software makes the job as quick as possible. Waypoint files can be created within TerraSync software, or imported from GPS Pathfinder® Office software, to help you navigate in the field. You can sort and filter imported features from your GIS, based on the order you want to visit them. Features can be viewed as a simple list, or on the color-coded map with an aerial photo or satellite image in the background for reference. To revisit an asset, select the corresponding feature from the list or

map, and then let the intuitive graphical GPS navigation tools guide you to precisely where you need to go. Once you've visited an asset, the TerraSync software automatically marks it as updated.

### Quality control made easy

With the TerraSync software it's a breeze to collect data to your required accuracy, either when collected in real time in the field, or to that predicted after postprocessing. Simply use the accuracy-based logging settings to specify the accuracy of the GPS data quality that your enterprise GIS demands and let TerraSync do the rest. To make sure your time in the field will be productive, use the Plan section to view a graphical prediction of the satellite constellation and identify the best times for data collection.

The TerraSync software integrates seamlessly with a range of Trimble GPS receivers to give you the high quality data you need. You can differentially correct your data back in the office, use real-time differential GPS, or both—the choice is yours. For extra precision, collect H-Star™ data with a GPS Pathfinder ProXRT receiver, a GPS Pathfinder ProXH™ receiver, or a GeoXH™ handheld. Completely integrated with existing data collection workflows, H-Star technology makes high accuracy data collection faster and easier than ever before.

Whichever combination of GPS receiver and correction method suits your needs, you can be sure of clear feedback while you work, and first-class data for your GIS.

Simple, effective, and productive in the field—the TerraSync software is the easy-to-use tool you need to collect and maintain quality GIS data.



## FEATURES AND OPTIONS

### Key features

- Collect position, feature, and attribute data
- Industry-leading GPS receiver configuration and control
- Fast, real-time map display supports multiple raster and vector background maps
- Graphical screens for navigation back to selected features
- Data dictionary editor for customized data collection requirements
- Data dictionary capabilities allow in-field modifications to data dictionaries
- Mission planning to find the best time to collect data
- Waypoint support for productive use of field time
- Supports multimedia attributes such as voice and image files
- Send and receive files by e-mail directly in the field
- Supports ESRI Shapefiles

### GPS accuracy

- Real-time differential correction (available sources depend on GPS receiver used)
- Improved position accuracy with differential postprocessing of GPS data
- Achieve up to decimeter accuracy using real-time or postprocessed H-Star technology (dependent on H-Star-capable receiver and antenna combination used)
- Support for collection of RTK data with Trimble 5800, R8, and R8 GNSS receivers

### Software editions

- TerraSync Standard edition for data collection
- TerraSync Professional edition for data collection and maintenance

For a product comparison of the Standard and Professional editions visit: [www.trimble.com/mgis\\_prodcomp.shtml](http://www.trimble.com/mgis_prodcomp.shtml)

### Supported GPS receivers

- GPS Pathfinder ProXT™ receiver
- GPS Pathfinder ProXH receiver
- GPS Pathfinder Pro XRS receiver
- GPS Pathfinder ProXRT receiver
- GPS Pathfinder XB receiver
- GPS Pathfinder XC receiver
- Trimble 5800 receiver
- Trimble R8 receiver
- Trimble R8 GNSS receiver

### Supported field computers with integrated GPS

- GeoXH handheld
- GeoXT™ handheld
- GeoXM™ handheld
- Juno™ ST handheld
- Trimble Nomad™ 800L handheld
- Trimble Nomad 800LC handheld
- Trimble Nomad 800LE handheld
- Trimble Recon® GPS XB edition
- Trimble Recon GPS XC edition

© 2000–2008, Trimble Navigation Limited. All rights reserved. Trimble, the Globe & Triangle logo, GeoExplorer, and GPS Pathfinder are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. GPS Analyst, GeoXH, GeoXM, GeoXT, H-Star, Juno, ProXH, and ProXT are trademarks of Trimble Navigation Limited. Nomad, Ranger, and Recon are either registered trademarks or trademarks of Tripod Data Systems Inc. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Trimble Navigation Limited is under license. Microsoft, Windows, Windows Mobile, and Windows Vista are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners. PN 13278N (05/08)

### Supported field computers

- Trimble Ranger™ handheld
- Trimble Recon handheld
- Trimble Nomad 800B handheld
- Any field computer running a supported Windows® operating system

### Available languages

- Chinese (Simplified)
- English
- French
- Russian
- German
- Italian
- Japanese
- Korean
- Portuguese
- Spanish

## RECOMMENDED PLATFORM

### Windows Mobile field computer

Operating system . . . . . Windows Mobile® version 5.0 software or Windows Mobile version 6

Processor type . . . . . ARM or XScale

Processor speed . . . . . 200 MHz or faster

Memory . . . . . 32 MB RAM at least 8 MB free memory

Input/output . . . . . Serial cable and RS-232 serial port (or appropriate adaptor) or Bluetooth® technology for connection to GPS Pathfinder Pro series receiver or GPS Pathfinder XB receiver

Display . . . . . Color touch screen (240 × 320 pixels or larger) Reflective screen (or other screen suitable for outdoor viewing)

### Windows field computer

Operating system . . . . . Windows® 2000 or Windows XP (Home, Professional, or Tablet PC Edition) (32- or 64-bit versions) or Windows Vista® (Home, Business, or Ultimate editions) (32- or 64-bit versions)

Processor type . . . . . Intel Pentium CPU

Processor speed . . . . . 500 MHz or faster

Memory . . . . . 64 MB RAM at least 8 MB free memory

Input/output . . . . . Serial cable and RS-232 serial port (or appropriate adaptor) or Bluetooth technology for connection to GPS Pathfinder Pro series receiver or GPS Pathfinder XB receiver

## SUPPORTED BACKGROUND FILE FORMATS

### Vector formats

- Trimble SSF format (.ssf, .cor, .imp)
- ESRI Shapefiles (.shp)


### Raster (image) formats

- JPEG (.jpg)
- JPEG 2000 (.jp2, .j2c)
- Enhanced Compression Wavelet (.ecw)
- MrSID (.sid)
- TIFF (.tif)
- Windows bitmap (.bmp)

## GPS POSTPROCESSING OPTIONS

- GPS Pathfinder Office software
- Trimble GPS Analyst™ extension for ESRI ArcGIS software

Specifications subject to change without notice.

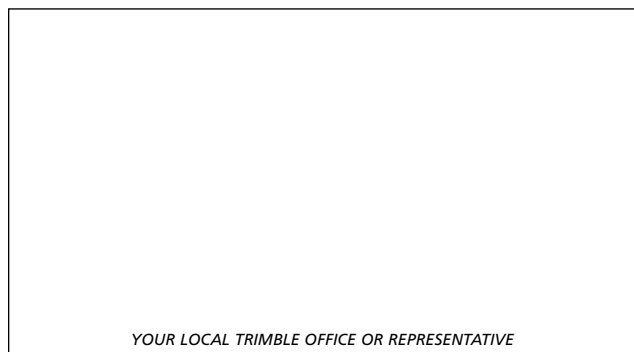

YOUR LOCAL TRIMBLE OFFICE OR REPRESENTATIVE

### NORTH & SOUTH AMERICA

Trimble Navigation Limited  
10355 Westmoor Drive  
Suite #100  
Westminster, CO 80021  
USA  
+1-720-587-4574 Phone  
+1-720-587-4878 Fax

### EUROPE & AFRICA

Trimble GmbH  
Am Prime Parc 11  
65479 Raunheim  
GERMANY  
+49-6142-2100-0 Phone  
+49-6142-2100-550 Fax

### ASIA-PACIFIC & MIDDLE EAST

Trimble Navigation  
Singapore PTE Limited  
80 Marine Parade Road  
#22-06 Parkway Parade  
Singapore, 449269  
SINGAPORE  
+65-6348-2212 Phone  
+65-6348-2232 Fax



[www.trimble.com](http://www.trimble.com)  
[store.trimble.com](http://store.trimble.com)